

## Excellent Durability Female Connector Cable Lug Connection Full Insulated Male And Female

Our Product Introduction

for more products please visit us on [cableslugs.com](http://cableslugs.com)

### Basic Information

- Place of Origin: China
- Brand Name: TLC
- Certification: UL, CUL, CE
- Minimum Order Quantity: 1000
- Price: USD
- Packaging Details: bag, carton
- Delivery Time: 5-30 working days
- Payment Terms: T/T
- Supply Ability: 1KK pcs per month




### Product Specification

- Durability: Excellent
- Application: Industrial Connection
- Usage: Electrical Connector
- Current Rating: Full Range
- Shape: Round
- Surface Finish: Tin Plated
- Material: Copper
- Color: Red, Green, Yellow, Blue
- Highlight: **Durability Cable Lug Connector CUL , Insulated bullet female connector TLC, CUL bullet female connector Pluggable**

## Product Description

FULLY INSULATED  
FEMALE QUICK DISCONNECTS

Material  
Insulation: Nylon  
Terminal Body: Brass  
Metallic Sleeve: Copper  
Plating: Tin

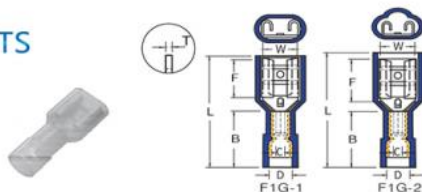

| WIRE RANGE                  | NEMA TAB        | ITEM NO.      | DIMENSION Nmm (inch) |           |           |            |            |           |           | FIG       | COLOR | STANDARD   | TOOLS | QTY BOX                                                                                                            |     |                                                                                                                 |       |
|-----------------------------|-----------------|---------------|----------------------|-----------|-----------|------------|------------|-----------|-----------|-----------|-------|------------|-------|--------------------------------------------------------------------------------------------------------------------|-----|-----------------------------------------------------------------------------------------------------------------|-------|
|                             |                 |               | W                    | F         | L         | B          | D          | C         | T         |           |       |            |       |                                                                                                                    |     |                                                                                                                 |       |
| mm <sup>2</sup><br>(A.W.G.) | Thickness<br>mm | Width<br>inch |                      |           |           |            |            |           |           |           |       |            |       |                                                                                                                    |     |                                                                                                                 |       |
| 0.5-1.5<br>(22-16)          | 0.5~2.8         | .020~.110     | FDFNYD1-110(5)       | 3.2 (126) |           |            |            |           |           |           |       | 0.3 (012)  | 1     | Red                                                                                                                | UL  | TLC MODEL<br>TLC2000A<br>WITH DIE INDEX<br>COLOR: RED<br>OR<br>IZUMI MODEL 34<br>WITH DIE INDEX<br>COLOR: RED   | 1,000 |
|                             | 0.8~2.8         | .032~.110     | FDFNYD1-110(8)       | 3.2 (126) | 6.5 (256) | 19.5 (768) |            |           |           |           |       |            |       |                                                                                                                    |     |                                                                                                                 |       |
|                             | 0.5~4.75        | .020~.187     | FDFNYD1-187(5)       | 5.0 (197) |           |            | 11.0 (433) | 4.0 (157) | 1.7 (067) |           |       | 0.35(.014) | 2     |                                                                                                                    |     |                                                                                                                 |       |
|                             | 0.8~4.75        | .032~.187     | FDFNYD1-187(8)       | 5.0 (197) | 6.4 (252) | 20.2 (795) |            |           |           |           |       |            |       |                                                                                                                    |     |                                                                                                                 |       |
|                             | 0.8~6.35        | .032~.250     | FDFNYD1-250          | 6.6 (260) | 7.5 (295) | 21.5 (846) |            |           |           |           |       | 0.4 (016)  | 1     |                                                                                                                    |     |                                                                                                                 |       |
| 1.5-2.5<br>(16-14)          | 0.5~4.75        | .020~.187     | FDFNYD2-187(5)       | 5.0 (197) |           |            |            |           |           |           |       | 0.35(.014) | 2     | Blue                                                                                                               | UL  | TLC MODEL<br>TLC2000A<br>WITH DIE INDEX<br>COLOR: BLUE<br>OR<br>IZUMI MODEL 34<br>WITH DIE INDEX<br>COLOR: BLUE | 1,000 |
|                             | 0.8~4.75        | .032~.187     | FDFNYD2-187(8)       | 5.0 (197) | 6.4 (252) | 20.2 (795) | 11.0 (433) | 5.0 (197) | 2.3 (091) |           |       |            |       |                                                                                                                    |     |                                                                                                                 |       |
|                             | 0.8~6.35        | .032~.250     | FDFNYD2-250          | 6.6 (260) | 7.5 (295) | 21.5 (846) |            |           |           |           |       | 0.4 (016)  | 1     |                                                                                                                    |     |                                                                                                                 |       |
| 4-6<br>(12-10)              | 0.8~6.35        | .032~.250     | FDFNYD5-250          | 6.6 (260) | 7.5 (295) | 24.2 (953) | 13.0 (512) | 6.5 (256) | 3.4 (134) | 0.4 (016) | 2     | Yellow     | UL    | TLC MODEL<br>TLC2000A<br>WITH DIE INDEX<br>COLOR: YELLOW<br>OR<br>IZUMI MODEL 5<br>WITH DIE INDEX<br>COLOR: YELLOW | 500 |                                                                                                                 |       |

FULLY INSULATED  
MALE QUICK DISCONNECTS

Material  
Insulation: Nylon  
Terminal Body: Brass  
Metallic Sleeve: Copper  
Plating: Tin



| WIRE RANGE<br><br>mm <sup>2</sup><br>(A.W.G.) | NEMA TAB<br><br>Thickness × Width<br>mm inch | ITEM NO.       | DIMENSION mm (inch) |           |             |            |           |           |           | COLOR  | STANDARD | TOOLS                                   | QTY BOX |
|-----------------------------------------------|----------------------------------------------|----------------|---------------------|-----------|-------------|------------|-----------|-----------|-----------|--------|----------|-----------------------------------------|---------|
|                                               |                                              |                | W                   | F         | L           | B          | D         | C         | T         |        |          |                                         |         |
| 0.5-1.5<br>(22-18)                            | 0.5×4.75 .020×.187                           | MDFNYD1-187(5) | 4.8 (189)           | 6.5 (256) | 22.0 (866)  | 11.0 (413) | 4.0 (157) | 1.7 (067) | 0.4 (016) | Red    | UL       | TLC MODEL<br>TLC2000A<br>IZUMI MODEL 34 | 500     |
|                                               | 0.8×4.75 .032×.187                           | MDFNYD1-187(8) |                     |           |             |            |           |           |           |        |          |                                         |         |
|                                               | 0.8×6.35 .032×.250                           | MDFNYD1-250    | 6.35 (250)          | 7.7 (303) | 24.0 (945)  |            |           |           |           |        |          |                                         |         |
| 1.5-2.5<br>(16-14)                            | 0.5×4.75 .020×.187                           | MDFNYD2-187(5) | 4.8 (189)           | 6.5 (256) | 22.0 (866)  |            |           |           |           | Blue   | UL       | TLC MODEL<br>TLC2000A<br>IZUMI MODEL 34 | 500     |
|                                               | 0.8×4.75 .032×.187                           | MDFNYD2-187(8) |                     |           |             | 11.0 (413) | 5.0 (197) | 2.3 (091) | 0.4 (016) |        |          |                                         |         |
|                                               | 0.8×6.35 .032×.250                           | MDFNYD2-250    | 6.35 (250)          | 7.7 (303) | 24.0 (945)  |            |           |           |           |        |          |                                         |         |
| 4-6<br>(12-10)                                | 0.8×6.35 .032×.250                           | MDFNYD5-250    | 6.35 (250)          | 7.7 (303) | 26.0 (1024) | 13.0 (512) | 6.5 (256) | 3.4 (134) | 0.4 (016) | Yellow |          |                                         |         |

## Product Description:

Our Female Connector Cable Lug is the ideal solution for any electrical wiring and connection needs. It is made from high quality copper material and is tin plated for superior surface finish. It features a round shape and is available in red, green, yellow and blue colors. With its full current rating, it is perfect for easy and secure connections of various electrical cables. It is also designed with a cable lug connector pin for easy wiring and reliable connections.

## Technical Parameters:

| Product Name                 | Cable Lug Connector      |
|------------------------------|--------------------------|
| Material                     | Copper                   |
| Usage                        | Electrical Connector     |
| Current Rating               | Full Range               |
| Color                        | Red, Green, Yellow, Blue |
| Shape                        | Round                    |
| Surface Finish               | Tin Plated               |
| Durability                   | Excellent                |
| Application                  | Industrial Connection    |
| Male and Female Terminal Lug | Yes                      |

|                            |     |
|----------------------------|-----|
| Female Connector Cable Lug | Yes |
| Cable Lug Connector        | Yes |

## Applications:

TLC Cable lug connectors are widely used in a variety of industrial and commercial applications. They are a reliable and cost-effective way of connecting wires and cables in an electrical system. This type of connector is UL, CUL, and CE certified, and is available in a variety of colors to fit your specific application. TLC Cable lug connectors offer excellent durability and are available in a range of current ratings for full range use. They are made from copper and come in both male and female terminals. TLC cable lugs are ideal for crimp terminals, wire connectors, and other electrical connectors. With a minimum order quantity of 1000, the price for these cable lugs is USD. The delivery time is 5-30 working days, and they can be shipped in bags or boxes. TLC offers a supply ability of 1KK pcs per month and accepts payment terms of T/T.

## Support and Services:

### Cable Lug Connector Technical Support & Services

We offer expert technical support and services for our Cable Lug Connector products. Our goal is to ensure that you are able to use our products to the fullest potential and to provide a satisfactory user experience.

Our technical support team is available 24/7 to answer any questions or concerns you may have about our products. We provide technical assistance in the form of telephone support, online chat, and email. Our technicians are knowledgeable and can help you troubleshoot any issue or provide guidance on how to use the product.

In addition to technical support, we also offer a variety of services such as installation, repairs, and maintenance. Our team of professionals can help you install the product correctly and make sure it's up and running quickly. We can also help with any repairs or maintenance you may need.

If you have any questions or require technical support or services for your Cable Lug Connector, please don't hesitate to contact us.

## Packing and Shipping:

### Packaging and Shipping for Cable Lug Connector

Cable Lug Connector will be securely packaged and shipped in accordance with standard industry practices. This ensures that the product is safe and secure during transit and delivery.

We use the following packaging methods for Cable Lug Connector:

Bubble wrap

Corrugated boxes

Plastic wrap

Foam cushioning

We offer both domestic and international shipping options for Cable Lug Connector. We use trusted couriers for our deliveries and can guarantee timely delivery of the product.

## FAQ:

Q: What is the brand name of the Cable Lug Connector?

A: The brand name of the Cable Lug Connector is TLC.

Q: Where is the Cable Lug Connector from?

A: The Cable Lug Connector is from China.

Q: What certifications does the Cable Lug Connector have?

A: The Cable Lug Connector has UL, CUL, and CE certifications.

Q: What is the minimum order quantity for the Cable Lug Connector?

A: The minimum order quantity for the Cable Lug Connector is 1000.

Q: How much does the Cable Lug Connector cost?

A: The Cable Lug Connector is priced in USD.



**TLC TERMINALS TECHNOLOGY LIMITED**



+8615338876153



joe@t-terminals.com



cableslugs.com

4B Huafeng Industrial Park Baolong 1 Road Baolong Street, Longgang District, Shenzhen City