

Flag Female Quick Disconnects Cable Lug For Industrial Connection Insulated And Non Insulated

Our Product Introduction

for more products please visit us on cableslugs.com

Basic Information


- Place of Origin: China
- Brand Name: TLC
- Certification: UL, CUL, CE
- Model Number: FLDNB
- Minimum Order Quantity: 1000
- Price: USD
- Packaging Details: bag, carton
- Delivery Time: 5-30 working days
- Payment Terms: T/T
- Supply Ability: 1KK pcs per month



Product Specification

- Durability: Excellent
- Application: Industrial Connection
- Current Rating: Full Range
- Surface Finish: Tin Plated
- Shape: Round
- Material: Copper
- Color: Red, Green, Yellow, Blue
- Product Name: Cable Lug Connector
- Highlight: **Quick Disconnects female cable lug,
Industrial female cable lug TLC,
Insulated copper wire lug connector TLC**

FLAG FEMALE QUICK DISCONNECTS NORMAL TYPE




Material

Insulation: Nylon
Terminal Body: Brass
Metallic Sleeve: Copper
Plating: Tin

WIRE RANGE mm ² (A.W.G.)	NEMA TAB		ITEM NO.	DIMENSION mm (inch)					COLOR	STANDARD	TOOLS	QTY BOX
	Thickness	Width		W	F	L	d1	T				
0.5-1.5 (22-18)	0.8 x 6.35	.032 x .250	FLDNY1-250	6.6 (.260)	7.6 (.299)	16.0 (.630)	1.7 (.067)	0.4 (.016)	Red		TLC MODEL TLC2000F WITH DIE INDEX COLOR: RED	1,000
1.5-2.5 (16-14)	0.8 x 6.35	.032 x .250	FLDNY2-250	6.6 (.260)	7.6 (.299)	16.0 (.630)	2.3 (.091)	0.4 (.016)	Blue	UL	TLC MODEL TLC2000F WITH DIE INDEX COLOR: BLUE	1,000
4-6 (12-10)	0.8 x 6.35	.032 x .250	FLDNY5-250	6.6 (.260)	7.6 (.299)	16.5 (.650)	3.4 (.134)	0.4 (.016)	Yellow		TLC MODEL TLC2000F WITH DIE INDEX COLOR: YELLOW	500

FLAG FEMALE QUICK DISCONNECTS NON-INSULATED




Material

Terminal Body: Brass
Plating: Tin

WIRE RANGE mm ² (A.W.G.)	NEMA TAB		ITEM NO.	DIMENSION mm (inch)					QTY BOX
	Thickness	Width		W	F	L	d1	T	
0.5-1.5 (22-18)	0.5 x 4.75	.020 x .187	FLDNB1-187(5)	5.0 (.197)	6.2 (.244)	11.3 (.455)	5.5 (.217)	0.4 (.016)	1,000
	0.8 x 4.75	.032 x .187	FLDNB1-187(8)	5.0 (.197)	6.2 (.244)	11.3 (.455)	5.5 (.217)	0.4 (.016)	
	0.8 x 6.35	.032 x .250	FLDNB1-250	6.6 (.260)	7.6 (.299)	14.0 (.551)	7.4 (.291)	0.4 (.016)	
	0.8 x 6.35	.032 x .250	FLDNG1-250	6.6 (.260)	7.8 (.307)	15.0 (.591)	9.3 (.366)	0.45 (.018)	
1.5-2.5 (16-14)	0.5 x 4.75	.020 x .187	FLDNB2-187(5)	5.0 (.197)	6.2 (.244)	11.6 (.457)	5.5 (.217)	0.4 (.016)	
	0.8 x 4.75	.032 x .187	FLDNB2-187(8)	5.0 (.197)	6.2 (.244)	11.6 (.457)	5.5 (.217)	0.4 (.016)	
	0.8 x 6.35	.032 x .250	FLDNB2-250	6.6 (.260)	7.6 (.299)	14.0 (.551)	7.4 (.291)	0.4 (.016)	
	0.8 x 6.35	.032 x .250	FLDNG2-250	6.6 (.260)	7.8 (.307)	15.0 (.591)	9.3 (.366)	0.45 (.018)	
4-6 (12-10)	0.8 x 6.35	.032 x .250	FLDNB5-250	6.6 (.260)	7.6 (.299)	14.5 (.571)	7.5 (.295)	0.45 (.018)	500

FLAG FEMALE QUICK DISCONNECTS
FLARED TYPE

Material
Insulation: Nylon
Terminal Body: Brass
Plating: Tin

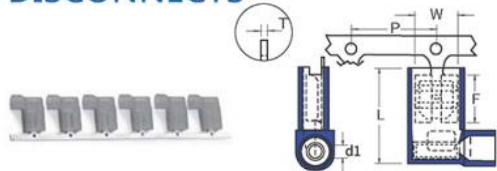

WIRE RANGE	NEMA TAB	ITEM NO.	DIMENSION mm (inch)					COLOR	STANDARD	TOOLS	QTY ROLL
			W	F	L	d1	T				
0.5-1.5 (22-18)	0.5×4.75 .020×.187	FLDNY1-187(A)-MS	5.0 (197)	7.0 (276)	15.0 (591)	1.6 (.063)	0.4 (.016)	Red	UL	TLC MODEL TLC2000FA WITH DIE INDEX COLOR: RED	1,000
	0.8×4.75 .032×.187	FLDNY1-187(B)-A-MS									
	0.8×6.35 .032×.250	FLDNY1-250A-MS	6.6 (260)	7.6 (299)	15.2 (598)						
1.5-2.5 (16-14)	0.5×4.75 .020×.187	FLDNY2-187(A)-MS	5.0 (197)	7.0 (276)	15.2 (598)	2.1 (.083)	0.4 (.016)	Blue	UL	TLC MODEL TLC2000FA WITH DIE INDEX COLOR: BLUE	1,000
	0.8×4.75 .032×.187	FLDNY2-187(B)-A-MS									
	0.8×6.35 .032×.250	FLDNY2-250A-MS	6.6 (260)	7.6 (299)	15.2 (598)						

FLAG FEMALE QUICK DISCONNECTS
FLARED TYPE

Material
Insulation: Nylon
Terminal Body: Brass
Metallic Sleeve: Copper
Plating: Tin



WIRE RANGE	NEMA TAB	ITEM NO.	DIMENSION mm (inch)					COLOR	STANDARD	TOOLS	QTY BOX
			W	F	L	d1	T				
0.5-1.5 (22-18)	0.5×4.75 .020×.187	FLDNY1-187(A)	5.0 (197)	7.0 (276)	15.0 (591)	1.6 (.063)	0.4 (.016)	Red	UL	TLC MODEL TLC2000FA WITH DIE INDEX COLOR: RED	1,000
	0.8×4.75 .032×.187	FLDNY1-187(B)									
	0.8×6.35 .032×.250	FLDNY1-250A	6.6 (260)	7.6 (299)	15.2 (598)						
1.5-2.5 (16-14)	0.5×4.75 .020×.187	FLDNY2-187(A)	5.0 (197)	7.0 (276)	15.2 (598)	2.1 (.083)	0.4 (.016)	Blue	UL	TLC MODEL TLC2000FA WITH DIE INDEX COLOR: BLUE	1,000
	0.8×4.75 .032×.187	FLDNY2-187(B)									
	0.8×6.35 .032×.250	FLDNY2-250A	6.6 (260)	7.6 (299)	15.2 (598)						

Product Description:

Flag Quick Disconnect Cable Lug Connector is a female connector cable lug, male and female terminal lug and pluggable connector. It is made of copper material and has excellent durability. The surface finish of the product is tin plated, which is suitable for industrial connection.

The Cable Lug Connector allows for convenient and safe connection, and is widely used in many industries. It is designed to ensure a tight fit and provide a reliable connection. The tin plated surface finish offers superior corrosion resistance and long-lasting performance. The copper material is highly durable and can withstand extreme temperatures.

The Cable Lug Connector provides a quick and easy installation process and can be used in a variety of applications. It is highly reliable and can be used for a variety of different applications. It is also highly durable and can withstand the elements, ensuring a long-lasting connection.

The Cable Lug Connector is a reliable and durable solution for industrial connection. It is easy to install and offers superior corrosion resistance. The copper material is highly durable and can withstand extreme temperatures. The tin plated surface finish ensures a long-lasting connection and provides superior corrosion resistance.

Technical Parameters:

Parameter	Value
Material	Copper
Durability	Excellent
Usage	Electrical Connector
Product Name	Cable Lug Connector
Surface Finish	Tin Plated
Shape	Round
Current Rating	Full Range
Application	Industrial Connection
Color	Red, Green, Yellow, Blue
Connector Type	Male connector cable lug, Cable lug connector, Cable lug connector male

Applications:

TLC Cable Lug Connector is a pluggable connector designed for industrial connection with excellent durability. It is UL, CUL and CE certified, and comes in a range of current ratings for full selection. The minimum order quantity is 1000 pieces, and the price is USD. The product is packaged in bags or cartons, and delivery time is 5-30 working days. Payment can be made by T/T, and the supply ability is 1KK pieces per month. Male and female terminal lugs are available for the cable lug connector, ensuring reliable and safe connection for various types of electrical applications.

Support and Services:

Cable Lug Connector Technical Support and Service

24/7 technical support hotline via telephone and email.

Onsite technical support and repair services.

Expert advice and assistance with installation and setup.

Troubleshooting and diagnostics support.

Upgrades and software patching.

Maintenance and repair services.

Packing and Shipping:

Packaging and Shipping

Cable Lug Connectors are generally packaged in cartons or boxes and shipped in the same way.

The size and weight of the cable lugs may determine the type of packaging and shipping required. For example, if the cable lugs are lightweight and small, they can be packaged in a small box or envelope and shipped via regular mail.

If the cable lugs are heavier and larger, they may require a larger box or container and may need to be shipped via a courier or freight service.

FAQ:

Q1: What brand is the Cable Lug Connector?

A1: The Cable Lug Connector is TLC.

Q2: Where is the Cable Lug Connector made?

A2: The Cable Lug Connector is made in China.

Q3: What certifications does the Cable Lug Connector have?

A3: The Cable Lug Connector has UL, CUL and CE certifications.

Q4: What is the minimum order quantity for the Cable Lug Connector?

A4: The minimum order quantity for the Cable Lug Connector is 1000.

Q5: What is the price and payment terms for the Cable Lug Connector?

A5: The price for the Cable Lug Connector is USD and the payment terms are T/T.



TLC TERMINALS TECHNOLOGY LIMITED



+8615338876153



joe@t-terminals.com



cableslugs.com

4B Huafeng Industrial Park Baolong 1 Road Baolong Street, Longgang District, Shenzhen City